



Garrett Wade


44C01.21 POLE SAW AND PRUNER

BLADE AND CUTTING HEAD INSTRUCTIONS

Technical memo **T-124**



Remove nut and bolt package from bottom of pruner head and aluminum spacer from separate package shown in figure 2 . At this time also remove the black plastic ring from the pruner head. Also remove the wooden dowel from the pole, set the long screw and wing nut aside to secure the head later

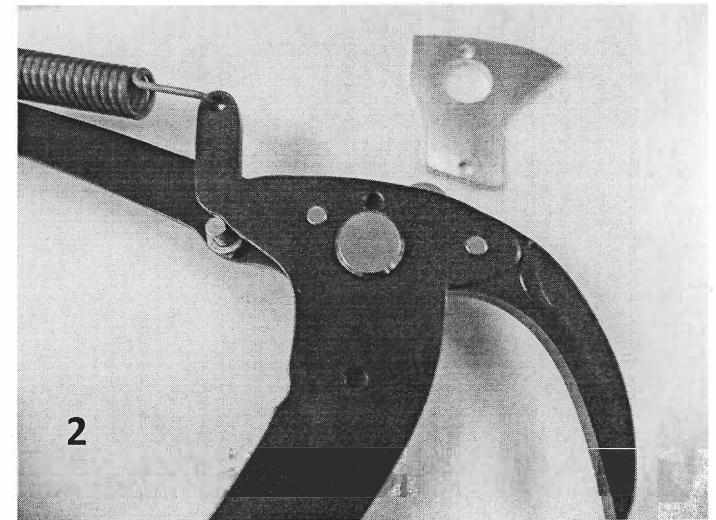

Place spacer as shown in figure 3 and line up screw holes. Place saw blade on spacer ***make sure blade curves away from pulleys*** as shown in figure 4.

Place black strap over blade and line up screw holes again, insert Philips screws and tighten. Once completed, attach the head and insert the long screw and wing nut to secure the head.

